






TB Terminal Blocks


1. General

TB series is applicable to circuit with alternating current of 50Hz, rated voltage not more than 600V and rated current not more than 100A for connection of wire. Standard: GB/T 14048.7 IEC 60947-7-1.



Terminal Blocks

2. Overall and mounting dimensions

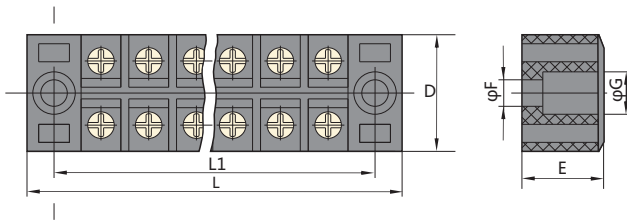

No.	Product type	Rated Current	Group count	Boundary dimension(mm)						Installation method
				L	L1	D	E	F	G	
1	TB-1503	15A	3	45.8	34	22.3	17.5	4.7	7.8	Screw fixation
2	TB-1504	15A	4	54.4	44	22.3	17.5	4.7	7.8	Screw fixation
3	TB-1506	15A	6	72.4	62	22.3	17.8	4.4	7.8	Screw fixation
4	TB-1512	15A	12	126.5	116	22.3	17.8	4.5	7.8	Screw fixation
5	TB-1510	15A	10	108.8	98.9	22.3	17.8	4.5	7.8	Screw fixation
6	TB-2503	25A	3	55.5	44.2	30.2	19.6	4.7	7.8	Screw fixation
7	TB-2504	25A	4	67.5	56	30.2	19.6	4.7	7.8	Screw fixation
8	TB-2506	25A	6	91.5	80.2	30.2	19.6	4.7	7.8	Screw fixation
9	TB-2512	25A	12	163.8	152.2	30.2	19.6	4.7	7.8	Screw fixation
10	TB-4503	45A	3	70	59.2	38	23.5	5	7.8	Screw fixation
11	TB-4504	45A	4	86.2	75.6	38	23.5	5.4	7.8	Screw fixation
12	TB-4505	45A	5	103	92.5	38	23.5	5.4	7.8	Screw fixation
13	TB-4506	45A	6	120	108.8	38	23.5	5.5	8	Screw fixation
14	TB-4512	45A	12	220.4	210.4	38	23.5	5.5	7.8	Screw fixation
15	TB-6003	60A	3	75.4	62.6	37.9	30.6	5	8	Screw fixation
16	TB-6004	60A	4	93.5	81	37.9	35.6	4.3	8	Screw fixation
17	TB-10003	100A	3	85.5	74.4	43.6	34.5	5.4	8	Screw fixation
18	TB-10004	100A	4	108.4	96.8	43.6	34.5	5.5	8	Screw fixation

3. Ordering information

- 3.1 Pay attention to type, connection area or current, classification and quantity of products when ordering.
- 3.2 Regular terminal block shall be formed with sole block.
- 3.3 Other special requirements shall be noted.
- 3.4 Ordering example: TB-10003 5
Means ordering model is TB, rated current is 100A, and has 3 groups and quantity is 5.